


# Top Coated Direct Thermal Printable Film

## C1049 (DTP) TC

### Structure

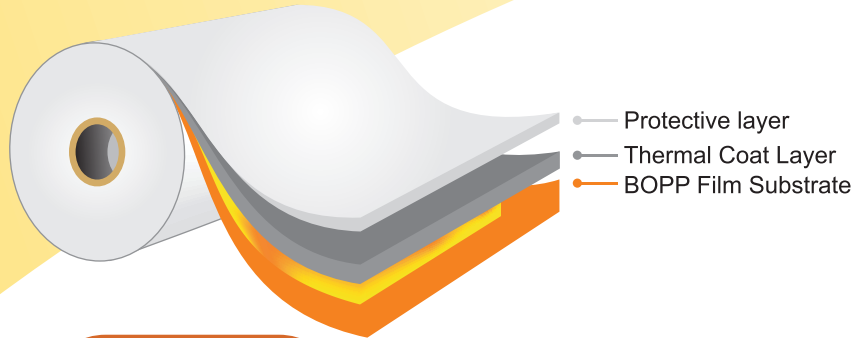

### Description

It is BOPP based, Top coated direct thermal printable (DTP) film.

### Features

- Direct thermal printable
- Excellent rub resistance
- Excellent resistance, to oil , solvent and water
- Dark image quality
- Paper look

### Applications

- Airline baggage tags, labels etc.
- Ready made hot food labels.
- Industrial bar code applications.
- Retail price marking.
- Logistics labels.

### Typical Values

Properties	Units	Test Method	C1049 (DTP) TC	
<b>Physical Data</b>				
Average Thickness	micron	D-374-C	75	100
Thickness Variation	% (±)		5	
Unit Weight	g/m <sup>2</sup>		49.99	73.82
Yield	m <sup>2</sup> /kg	ASTM D-4321	20.00	13.55
Activation Temperature	°C		> 70°	
Image Density			> 1.0	
Image Colour			Black	
Printing Process			Direct Thermal	

**Disclaimer :** The information provided above is based on COSMO FILMS LTD's conclusive tests, which are indicative only and provided as guidelines. They do not constitute a guarantee of any specific product attributes or the suitability of products for specific applications.